




WAAR INNOVATIE & COMFORT SAMENKOMEN





Midea Solunar EF

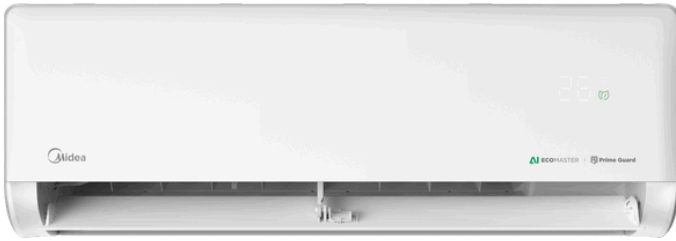

ENERGIE
A++



AI
AI algorithm



SLEEP CURVE
I-Sleep



GELUID
Stil



ECO
ECOMASTER



3D
Airflow



WIFI
Module



CLEAN
Zelf reinigings modus



ANTI-CORROSIE
Prime Guard



MODE
Intelligent Defrost

Seasonal Cooling

Binnenunit	EF-09RD0-I	EF-12RD0-I	EF-18RD0-I	EF-24RD0-I
Buitenunit	EF-09RD0H-O	EF-12RD0H-O	EF-18RD0H-O	EF-24RD0H-O
SEER	7,0	6,5	7,4	6,5
Capacity kW	2,6	3,5	5,0	7,0
Energy Efficiency Class	A++	A++	A++	A++

Binnenunit

Afmetingen

mm	723×199×286	813×201×289	975×218×308	1055×231×330
kg	7.0/9.2	7.4/9.7	10.3/13.3	12.4/15.9

Geluid (Hi/Mi/Lo/Si)

db (A)	38.5/33.0/23.5/19.0	39.0/32.0/24.0/20.0	43.0/35.5/33.5/20.0	45.0/39.5/36.0/20.0
--------	---------------------	---------------------	---------------------	---------------------


Buitenunit

Afmetingen

mm	720×270×495	720×270×495	805×330×554	890×342×673
kg	20.4/22.3	20.4/22.3	29.8/32.3	38.3/41.5

Geluid

db (A)	54,5	56,0	57,5	60,0
--------	------	------	------	------

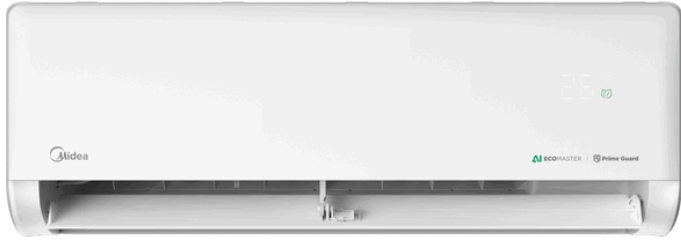

Midea Solunar EF

2,5 - 7,0 kW



Heating
Average

Binnenunit	EF-09RD0-I	EF-12RD0-I	EF-18RD0-I	EF-24RD0-I
Buitenunit	EF-09RD0H-O	EF-12RD0H-O	EF-18RD0H-O	EF-24RD0H-O
SCOP	4,1	4,1	4,1	4,1
Energy Efficiency Class	A+	A+	A+	A+

Koudemiddel circuit

Aansluitingen	6.35mm(1/4in) / 9.52mm(3/8in)	6.35mm(1/4in) / 9.52mm(3/8in)	6.35mm(1/4in) / 12.7mm(1/2in)	6.35mm(1/4in) / 12.7mm(1/2in)
Max. leidinglengte	25 m	25 m	30 m	50 m



Midea Solstice EZ



Binnenunit	EZ-09RD6-I	EZ-12RD6-I	EZ-18RD6-I	EZ-21RD6-I	EZ-24RD6-I
Buitenunit	EZ-09RD6H-O	EZ-12RD6H-O	EZ-18RD6H-O	EZ-21RD6H-O	EZ-24RD6H-O
Binnenunit Zwart	EZB-09RD6-I	EZB-12RD6-I	EZB-18RD6-I	EZB-21RD6-I	EZB-24RD6-I
EER	4,10	3,24	3,49	3,60	3,30
Capacity kW	2,6	3,5	5,0	6,0	7,0
Input	634(80~1300)	1080(130~1550)	1433(160~1787)	1694 (420~3450)	2120(420~3450)

Binnenunit

Afmetingen

mm	723x199x286	813x201x289	975x218x308	1055x231x330	1055x231x330
kg	7.5/9.6	8/10.4	10.2/13.3	13/16.4	13/16.4

Geluid (Hi/Mi/Lo/Si)

db (A)	39/34/25/19.0	39/32/26/20	43/36/28/21.5	46/39.5/32.5/21.5	46/39.5/32.5/21.5
--------	---------------	-------------	---------------	-------------------	-------------------


Buitenunit

Afmetingen

mm	765x303x555	765x303x555	890x342x673	890x342x673	890x342x673
kg	23.1/25.4	23.1/25.4	37.8/41.0	41.0/44.0	41.0/44.0

Geluid

db (A)	54	55	57	60	60
--------	----	----	----	----	----

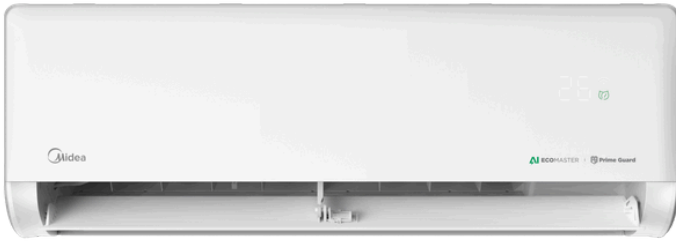

Midea Solstice EZ

2,6 - 7,0 kW

Binnenunit	EZ-09RD6-I	EZ-12RD6-I	EZ-18RD6-I	EZ-21RD6-I	EZ-24RD6-I
Buitenunit	EZ-09RD6H-O	EZ-12RD6H-O	EZ-18RD6H-O	EZ-21RD6H-O	EZ-24RD6H-O

COP	4,30	3,75	3,75	3,71	3,71
Capacity kW	2.9 (0.8~3.7)	3.8 (1.1~4.1)	5.4 (1.4~6.8)	7.3 (1.6~9.4)	7.3 (1.6~9.4)
Input	674(70~1075)	1016(160~1400)	1440(230~1750)	1970(300~3150)	1970(300~3150)
Current	4.45(0.32~4.76)	4.4(0.7~6.3)	6.26(1.1~7.60)	8.56(1.3~13.7)	8.56(1.3~13.7)

SEER	8,8	8,5	8,5	8,5	7,9
Energy Efficiency Class	A+++	A+++	A+++	A+++	A++

SCOP	4,6	4,6	4,6	4,6	4,6
Energy Efficiency Class	A++	A++	A++	A++	A++

Koudemiddel circuit


Aansluitingen	6.35mm(1/4in)/9.52mm(3/8in)	6.35mm(1/4in)/9.52mm(3/8in)	6.35mm(1/4in)/12.7mm(1/2in)	6.35mm(1/4in)/12.7mm(1/2in)	6.35mm(1/4in)/12.7mm(1/2in)
Max. leidinglengte	25 m	25 m	30 m	50 m	50 m



Midea Breezeless EZ



ENERGIE
A++



AIRFLOW
3D Luchtstroom



GELUID
Stil



AIRFLOW
Lange afstand



MODE
iECO



SLEEP CURVE
I-Sleep

Binnenunit	MSCB1BU-09HRFN8-ME	MSCB1BU-12HRFN8-ME
Buitenunit	MOX103-09HFN8-ME	MOX103-12HFN8-ME
Koelvermogen	2,79 (1,02-3,52)	3,59 (1,38-4,31)
Warmteafgifte	2,93 (1,02-3,81)	3,79 (1,08-4,39)
SCOP	4,1 / A+	4,2 / A+
SEER	7,6 / A++	7,1 / A++

Binnenunit

Afmetingen

mm	812x199x299	812x199x299
kg	9,1	9,3

Geluid Lo/Med/Hi

db (A)	20,5/32,0/37,0	21,0/35,5/37,5
--------	----------------	----------------

Buitenunit

Afmetingen

mm	720x270x495	720x270x495
kg	22,7	22,9

Geluid

db (A)	56	56
--------	----	----

Midea Multi-split

Free-match



5 - 12 kW

Setnaam	M20D-18HFN8-Q	M30D-27HFN8-Q	M40D-36HFN8-Q	M50D-42HFN8-Q
Aantal binnendelen	1 tot 2	1 tot 3	1 tot 4	1 tot 5
Koelcapaciteit	5,27	7,91	10,55	12,31
Verwarmings vermogen	5,57	8,21	10,55	12,31
Energieverbruik koeling	1800 (690-2000)	2470 (750-2470)	3600 (1250-3600)	3830 (680-1800)
Afmetingen (B x T x H)	800x333x554 mm	845x363x702 mm	946x410x810 mm	946x410x810 mm
Geluidsrukniveau	56 dB (A)	59 dB (A)	63 dB (A)	62 dB (A)
Gewicht	36 kg	53 kg	68,8 kg	73,3 kg

Koudemiddel circuit

Leidinglengte per binnendeel	25 m	30 m	35 m	35 m
Max. leidinglengte	40 m	60 m	80 m	80 m



WAAR INNOVATIE & COMFORT SAMENKOMEN



Sales

(+31) 073 658 0001

sales@acr.nl

ma-vrij 08:30 - 17:00



Logistiek

(+31) 073 658 0000

info@acr.nl

ma-vrij 08:30 - 17:00